(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 27 October 2005 (27.10.2005)

PCT

(10) International Publication Number WO 2005/101543 A2

(51) International Patent Classification⁷:

H01M

(21) International Application Number:

PCT/IB2005/000958

- (22) International Filing Date: 12 April 2005 (12.04.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:


2004-117793

13 April 2004 (13.04.2004) JP

- (71) Applicant (for all designated States except US): TOY-OTA JIDOSHA KABUSHIKI KAISHA [JP/JP]; 1, Toyota-cho, Toyota-shi, Aichi-ken 471-8571 (JP).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): KATANO, Koji [JP/JP]; Toyota Jidosha Kabushiki Kaisha, 1, Toyota-cho, Toyota-shi, Aichi-ken 471-8571 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CONTROL APPARATUS AND CONTROL METHOD FOR FUEL CELL

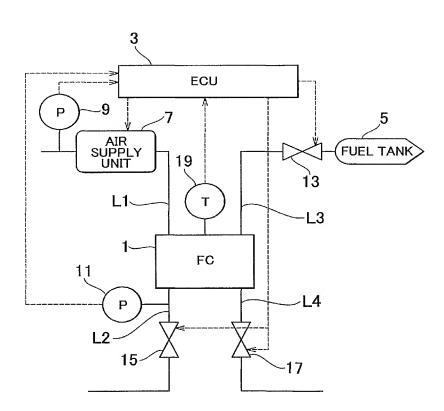

(57) Abstract: A control apparatus for a fuel cell (1), including oxidizing gas supplying means (7) for supplying oxidizing gas to a cathode via an oxidizing gas supply line (L 1); cathode-side gas pressure detecting means (11) for detecting a gas pressure within the oxidizing gas supply line (L 1) or the cathode; hydrogen supplying means (5) for supplying hydrogen to an anode via a hydrogen supply line (L3); target hydrogen partial pressure determining means for determining a hydrogen pressure among a gas pressure within the hydrogen supply line (L3) or the anode; hydrogen supply pressure calculating means for calculating a hydrogen supply pressure of hydrogen to be supplied to the fuel cell (1), based upon the target hydrogen partial pressure and the gas pressure detected by the cathode-side gas pressure detecting means (11); and hydrogen supply control means (13) for supplying hydrogen from the hydrogen supplying means (5) to the fuel cell (1) at the hydrogen supply pressure, and the method thereof.

WO 2005/101543 A2



Published:

 without international search report and to be republished upon receipt of that report For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.